


Etabloc – The Compact Pump

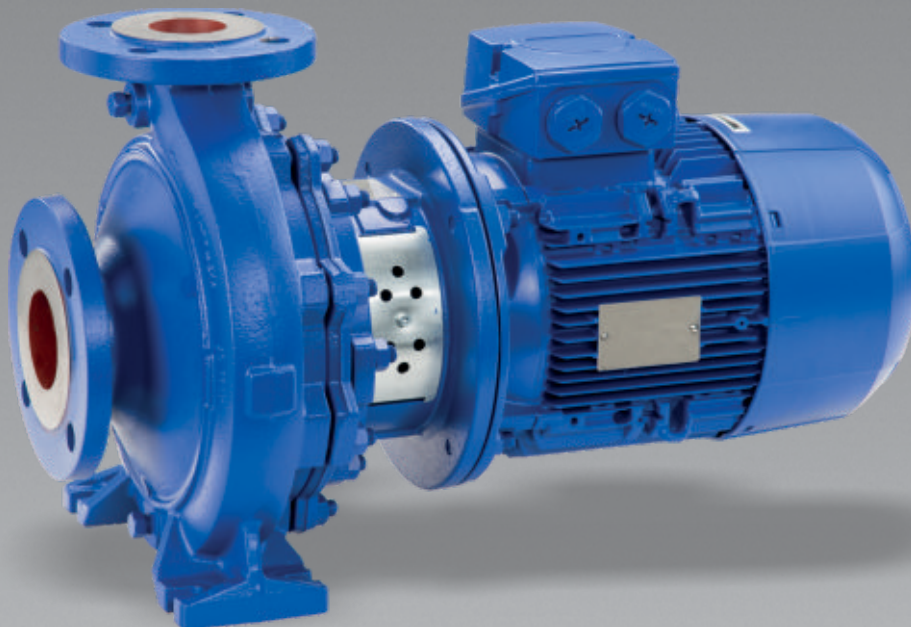


Applications :

Pure liquids not chemically or mechanically aggressive to the pump materials.

- Water supply
- Cooling water
- Swimming pool water
- Fire-fighting systems/ water
- Seawater
- Spray irrigation
- Irrigation
- Service water
- Cleaning agents
- Drinking water
- Brackish water
- Drainage
- Condensate
- Heating, air-conditioning
- Hot water



Ⓐ Etabloc with KSB SuPremE® motor, PumpMeter and PumpDrive Eco




Ⓑ Etabloc with PumpMeter, PumpDrive and IE3 motor



Ⓒ Etabloc with PumpMeter and IE3 motor

Ⓐ Ⓑ Ⓒ - can be made available from KSB AG.

Etabloc – The Compact Pump

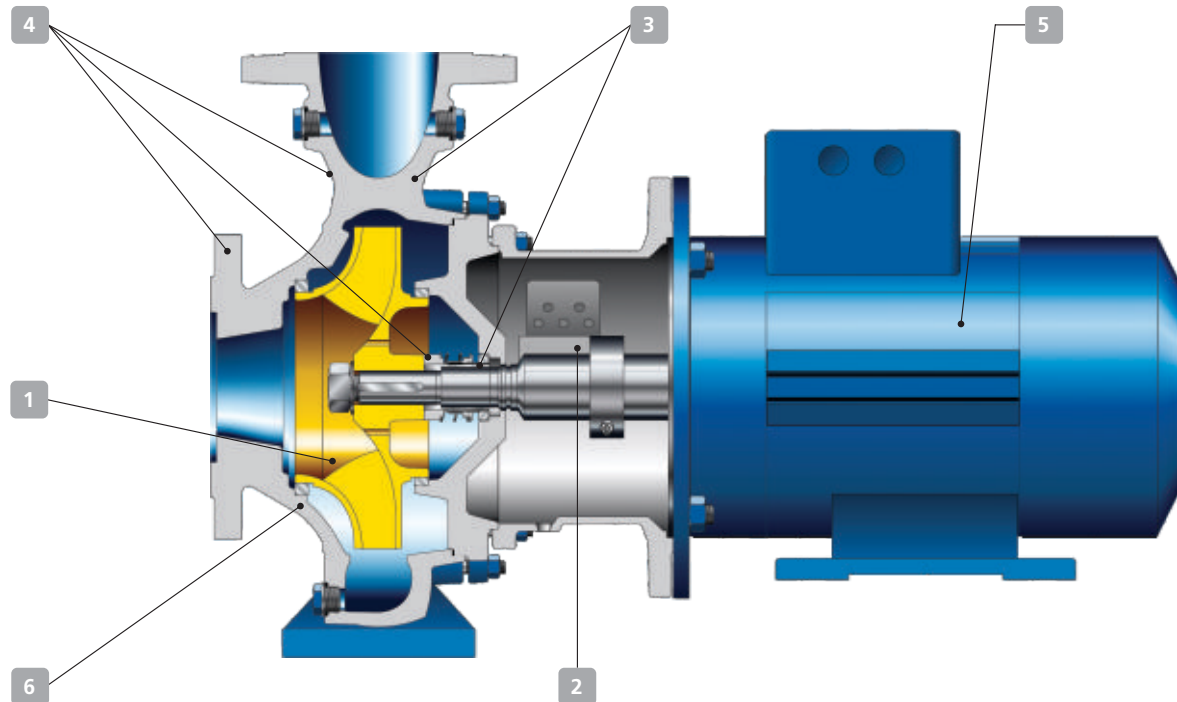

1 High energy efficiency

- Optimised hydraulic system of high efficiency. As a standard, the impellers are trimmed to the operating point.
- Exceed the requirements of the ErP Directive applicable to standardised water pumps from 2015.

2 Compact design

- Pump with stub shaft design, eliminates the need for coupling alignment.

3 Operating reliability

- Good suction performance resulting low vibration levels and very smooth running.
- Shaft sleeve to protect shaft against water, mechanical wear and damage.

4 Versatile

- Great choice of materials for many applications available as a standard.
- Options available for mechanical seal selection.
- Flange drilling as per ASME 16.1 as standard and EN1092-2 as an option.

5 Robust and safe

- KSB IEC standardised IE2 high efficiency motor.
- IP55 enclosure motor.

6 Service-friendly

- Fast delivery of new pumps and spare parts.
- Back pullout design, easier to assemble and dismantle.
- Thanks to the larger seal chamber.
- Threaded holes for forcing screws between the casing cover and bearing bracket.

Material variants

	India	KSB AG*
Grey cast iron	A48 CL 35B	EN-GJL-250
Stainless steel	A743 Gr. CF8M	1.4408
Bronze	CC480K-GS/IS318 LTB2	CC480K-GS
Nodular cast iron		EN-GJS-400-15

* Can be made available from KSB AG.

Technical data

	India	KSB AG*
Pump size	DN 25 to 150 mm	DN 25 to 150 mm
Flow rate	Up to 350 m ³ /hr (50 Hz) -----	Up to 640 m ³ /hr (50 Hz) Up to 753 m ³ /hr (60 Hz)
Head	Up to 160 m (50 Hz) -----	Up to 160 m (50 Hz) Up to 148 m (60 Hz)
Fluid temperature	-30°C to + 140°C	-30°C to + 140°C
Pressure	Up to 16 bar	Up to 16 bar
Power	Up to 22 kW	Up to 110 kW

* Can be made available from KSB AG.



KSB Pumps Limited
Standard Pumps Division

Plot No. E-3 & E-4, MIDC Sinnar (Malegaon), Nashik - 422 113.

Tel.: +91 2551 230252 / 253, 229700 Fax : +91 2551 230254 www.ksbindia.co.in

Mktg. Serv. / 06-16 / 3,000

Subject to technical modification without prior notice.

1173.021/01